

18' to 80'

Reflect Ray[®] ^{EDS} 6

Radiant Heating Systems

**Custom
Designed
for High
Bays and
Aircraft
Hangars.**

**Superior to
Conventional
Heating Systems.**

**Saves on
Energy Costs.**


**Reduces
Temperature
Fluctuations.**

Reflect O-Ray[®] EDS 6


Engineered Designed System Vacuum Heating Systems

Benefits

- Each system is custom designed for optimum comfort and efficiency.
- Vacuum fired systems.
- 30–50% energy savings over conventional systems.
- 100% factory tested.
- The original Dry Tube system.
- Uses natural gas or propane gas.
- Burner inputs—240K and 360K.
- Tubing network maintains uniform heat throughout the building.
- Radiant tubing constructed entirely of corrosion resistant aluminized steel.
- Three-try, direct spark ignition.
- Electronic flame monitoring—100% safety lockout.
- 24-volt solid state controls.
- Burner flame inspection window.
- Pre-purge cycle.
- Burner housing is powder coated.
- 10 year warranty on radiant tubes for internally created corrosion.
- Reduce utility drop installations by up to 2/3rd's.

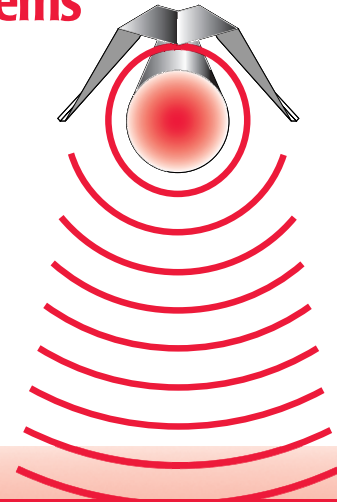

TYPICAL RADIANT TUBING ASSEMBLY WITH REFLECTORS
CEILING MOUNTED/REQUIRES NO FLOOR SPACE/
FULLY ALUMINIZED STEEL TUBE SYSTEM

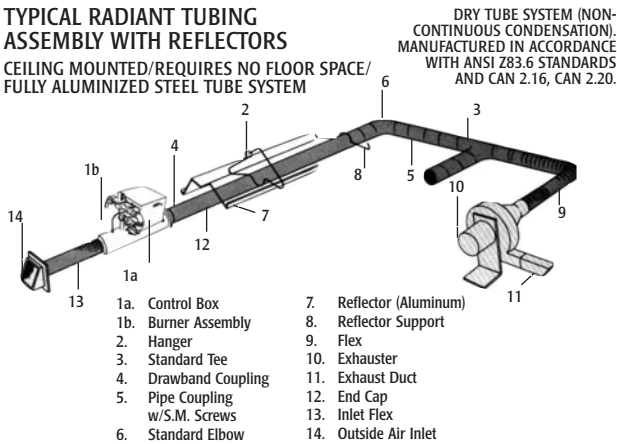

Superior to conventional heating

- Less fuel and electrical consumption.
- Fewer electrical hookups.
- Fewer gas line drops.
- Less building ceiling and wall penetrations.
- Less maintenance – no filters.
- No system corrosion – no condensate removal required.
- Even temperatures for total comfort.

Applications

- Aircraft hangars.
- Structures with high bays.
- Structures to any height providing adequate system input



Combustion Research Corporation
2516 Leach Road • Rochester Hills, MI 48309
248-852-3611 / Fax: 248-852-9165
Toll Free: 888-852-3611
E-mail: crc4@ix.netcom.com
www.combustionresearch.com

Burner #	Input Rate BTU Hr	Fuel Type	Suggested Orifice Size
#0600.NG	240,000	Natural	9/32"
#0600.LP	240,000	Propane	#17
#0610.NG	360,000	Natural	11/32"
#0610.LP	360,000	Propane	#3

Burner #	Manifold Gas Pressure	Minimum Supply Gas Pressure	Air Suction Hot
0600.NG	3 5" W.C.	7" W. C.	.5" W.C.
0600.LP	10" W.C.	11" W. C.	.5" W.C.
0610.NG	3 5" W.C.	7" W. C.	.5" W.C.
0610.LP	10" W.C.	11" W. C.	.5" W.C.

DESIGN TUBE REQUIREMENTS FOR OPTIMUM EFFICIENCIES
The dimensions in the table below are used in the design of Reflect-O-Ray EDS/6 systems. Every effort should be made to hold the dimensions given on the layout drawing. Deviations from the dimensions listed below should be verified with the manufacturer. For further design assistance and equipment information please consult manual.

BURNER TYPE	#600 240,000 BTU/Hr		#610 360,000 BTU/Hr	
	Standard Extended Tube System	Optional High Output System	Standard Extended Tube System	Optional High Output System
Radiant Tube between any Burner & Vacuum Exhauster				
Maximum Recommended	260'	160'	230'	190'
Minimum Recommended	160'	120'	190'	150'
Maximum Flows through one Tube	2	2	2	2
Distance before Elbow - Minimum	30'	30'	30'	30'
- Maximum	200'	160'	230'	190'

CLEARANCE TO COMBUSTIBLES				
	TOP	BOTTOM	SIDE	BACK SIDE OF SHIELD
REFLECTOR PN 600	12"	74"	36"	-
REFLECTOR PN 600 WITH SIDE SHIELD PN 663	12"	74"	50"	36"

Maximum Number of Burners Recommended Per Exhauster	
BURNER	PN0402.060 1HP 110V 220V
0600.NG/LP 240,000 BTU	2
0610.NG/LP 360,000 BTU	2



DISTRIBUTED BY: